




CARPET POLES



- Designed to allow easy transportation for rolls of carpet & other materials.
- Poles are made with StressProof® Steel, the best available material for this application.
- 2,500LB to 3,000LB. CAPACITIES
- Pole Diameters of 2.50", 2.75" & 3.0"

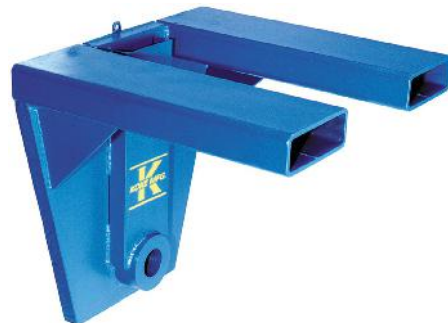

CARRIAGE MOUNT



FORK MOUNT



INVERTED FORK MOUNT

CARRIAGE MOUNT (CLASS 2)				
MODEL	POLE DIA.	POLE LENGTH	CAPACITY (LBS.)	WEIGHT (LBS.)
CR-2-2.5-8	2.5"	8'	2,500@48"LC	230
CR-2-2.5-9	2.5"	9'	2,500@54"LC	247
CR-2-2.5-10	2.5"	10'	2,500@60"LC	264
CR-2-2.5-12	2.5"	12'	2,500@72"LC	297
CR-2-2.75-8	2.75"	8'	2,750@48"LC	257
CR-2-2.75-9	2.75"	9'	2,750@54"LC	277
CR-2-2.75-10	2.75"	10'	2,750@60"LC	297
CR-2-2.75-12	2.75"	12'	2,750@72"LC	337
CR-2-3-8*	3"	8'	3,000@48"LC	324
CR-2-3-9*	3"	9'	3,000@54"LC	348
CR-2-3-10*	3"	10'	3,000@60"LC	372
CR-2-3-12*	3"	12'	3,000@72"LC	420

CARRIAGE MOUNT (CLASS 3)				
MODEL	POLE DIA.	POLE LENGTH	CAPACITY (LBS.)	WEIGHT (LBS.)
CR-3-2.5-8	2.5"	8'	2,500@48"LC	245
CR-3-2.5-9	2.5"	9'	2,500@54"LC	262
CR-3-2.5-10	2.5"	10'	2,500@60"LC	279
CR-3-2.5-12	2.5"	12'	2,500@72"LC	312
CR-3-2.75-8	2.75"	8'	2,750@48"LC	272
CR-3-2.75-9	2.75"	9'	2,750@54"LC	292
CR-3-2.75-10	2.75"	10'	2,750@60"LC	312
CR-3-2.75-12	2.75"	12'	2,750@72"LC	352
CR-3-3-8*	3"	8'	3,000@48"LC	344
CR-3-3-9*	3"	9'	3,000@54"LC	368
CR-3-3-10*	3"	10'	3,000@60"LC	392
CR-3-3-12*	3"	12'	3,000@72"LC	440

FORK MOUNT				
MODEL	POLE DIA.	POLE LENGTH	CAPACITY (LBS.)	WEIGHT (LBS.)
FM-2.5-8	2.5"	8'	2,500@48"LC	245
FM-2.5-9	2.5"	9'	2,500@54"LC	262
FM-2.5-10	2.5"	10'	2,500@60"LC	279
FM-2.5-12	2.5"	12'	2,500@72"LC	296

INVERTED FORK MOUNT (MAX. 30" DIA. ROLL)				
MODEL	POLE DIA.	POLE LENGTH	CAPACITY (LBS.)	WEIGHT (LBS.)
FM1-2.5-8	2.5"	8'	2,500@48"LC	347
FM1-2.5-9	2.5"	9'	2,500@54"LC	364
FM1-2.5-10	2.5"	10'	2,500@60"LC	381

OPTIONS	
OPTION	DESCRIPTION
CB-2HD	HEAVY DUTY BACK PLATE CL2
CB-3-HD	HEAVY DUTY BACK PLATE CL3
CB-2-QD	CLASS 2 QUICK DISCONNECT OPTION
CB-3-QD	CLASS 3 QUICK DISCONNECT OPTION

**CUSTOM LENGTHS AND COIL RAMS AVAILABLE
CALL US WITH YOUR REQUIREMENTS**