




LIFT & TILT JIBS

Lift Jibs allow for flexible lifting of long, bulky loads, such as bar stock, piping and tubing. The forklift lift jib slide over forks and secure to lift truck with a safety chain. Multiple hole locations and (2) standard swivel hook with shackles give you many lifting options. The lift jib goes from 82" retracted length to 144" fully extended. Loop handle on end allows for ease of extending jib. If you need additional lifting height, the tilting and telescoping lift jib has 3 vertical positions that can gain you up to 73" more vertical lift! Standard capacities range from 3,000LBS. to 10,000LBS. capacity. If you need a custom lift jib, please call us with your needs.

LIFT JIBS

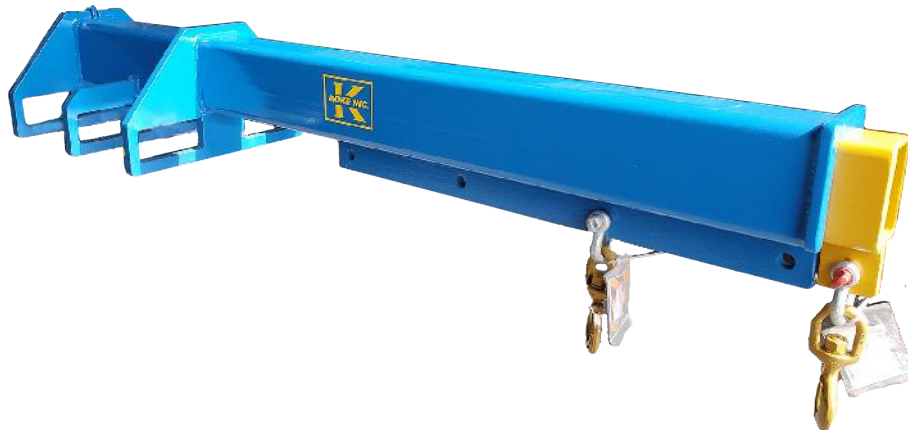


- Fully Welded
- Constructed with Structural Tube Steel & Heavy Plate
- Low Profile
- Use with forks up to 2.25" x 7"
- 2 Swivel Hooks with Screw Pin Shackles
- Telescoping with T-handle Screw Lock
- Telescopes from 6'10" out to 12'
- Safety Chain to Secure to Forklift

MODEL	RETRACTED LENGTH	EXTENDED LENGTH	CAPACITY RETRACTED	CAPACITY EXTENDED	WEIGHT
LIFTJIB-1	82"	144"	3,000	1,500	326 LBS
LIFTJIB-2	82"	144"	6,000	3,000	486 LBS
LIFTJIB-3	82"	144"	8,000	4,000	525 LBS
LIFTJIB-4	82"	144"	10,000	5,000	596 LBS

TILT JIBS



- Fully Welded
- Constructed with Structural Tube Steel & Heavy Plate
- 3 Position Tilt, up to 73" Additional Vertical Lift
- Use with forks up to 2" x 7"
- 2 Swivel Hooks with Screw Pin Shackles
- Telescoping with Pin Lock
- Telescopes from 6'10" out to 12'
- Safety Chain to Secure to Forklift

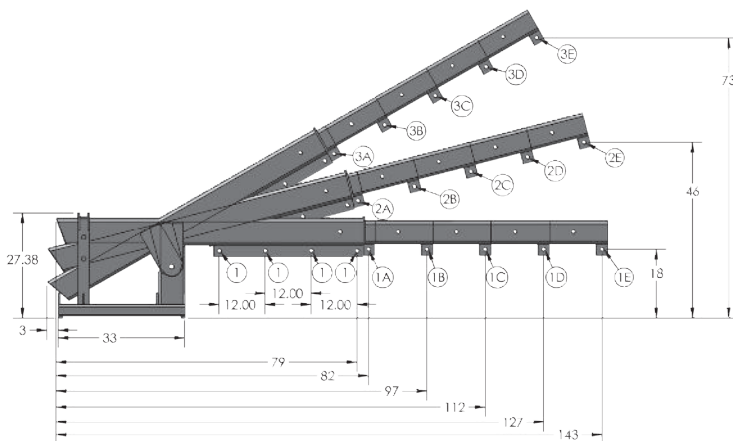

POSITION(S)	CAPACITY (LBS.)			
	TILTJIB-1	TILTJIB-2	TILTJIB-3	TILTJIB-4
1	3,000	6,000	8,000	10,000
1A,2A,3A	2,900	5,800	7,700	9,600
1B,2B,3B	2,400	4,800	6,400	8,500
1C,2C,3C	2,000	4,000	5,300	6,300
1D,2D,3D	1,700	3,400	4,500	5,500
1E,2E,3E	1,500	3,000	4,000	5,000

MODEL	RETRACTED LENGTH	EXTENDED LENGTH	CAPACITY RETRACTED	CAPACITY EXTENDED	WEIGHT
TILTJIB-1	82"	144"	3,000	1,500	420 LBS
TILTJIB-2	82"	144"	6,000	3,000	575 LBS
TILTJIB-3	82"	144"	8,000	4,000	625 LBS
TILTJIB-4	82"	144"	10,000	5,000	724 LBS